

Cim 95A

FILTERING FOOT CHECK VALVE - STAINLESS STEEL FILTERING FOOT FROM 1/2" TO 1"1/2 - BRASS FROM 2" TO 4"



This article was made in compliance with the quality management requirements of ISO 9001 standard. All articles are tested according to the EN 12266-1 standard.

It is used in a wide variety of sectors for non-return piping systems: pump installations, in wells and agricultural systems and generally with any non corrosive liquid.


It is guaranteed for 5 years.

It is made of a brass alloy that complies with standard EN 12165-CW617N-M.

Nominal Pressure: PN 16


Operating temperature: -10 to 40°C

FLOW AND PRESSURE DROP

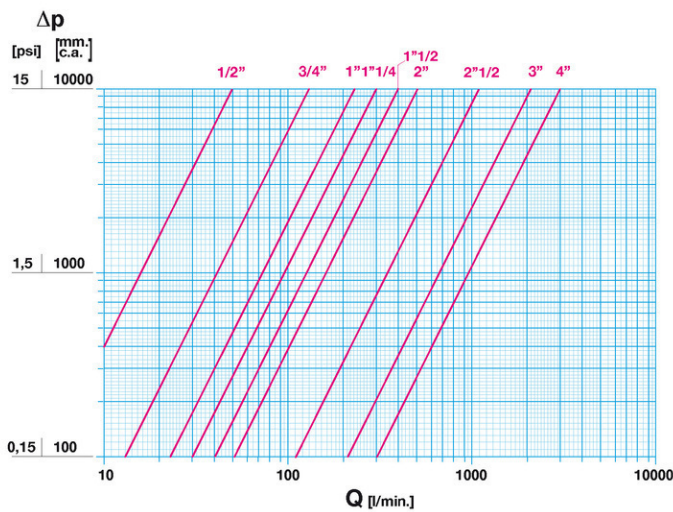


Notes:
 1 l/min = 0,06 m3/h
 1 m3/h = 16,67 l/min
 1 bar = 10.000 mm w.c.
 1 psi = 690 mm w.c.

PRESSURE TEMPERATURE RATINGS

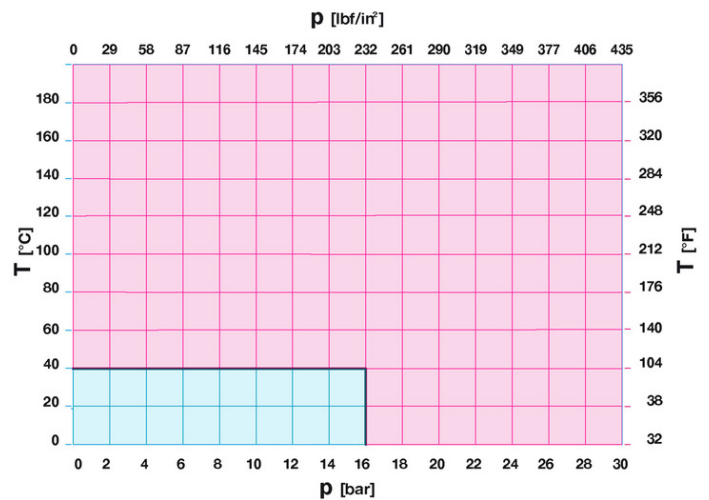

Notes:
 1 bar = 14,5 psi
 1 bar = 14,5 lbf/in2
 $^{\circ}\text{C} = 5/9 \times (^{\circ}\text{F} - 32)$
 $^{\circ}\text{F} = 32 + (9/5 \times ^{\circ}\text{C})$

TECHNICAL DRAWING

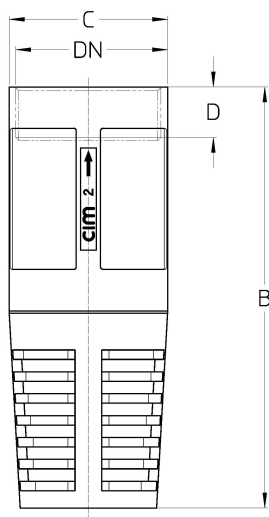

DN	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"
Grms.	135	225	325	480	665	1230	2110	3015	4985
B	97	114,5	130,5	146	168	173	208	227,5	259
C	26	32	38	47	54	65	83	95	123
D	10	12	13	15	15	22	20	20	24

Thread:
ISO 228

Upon request:
ANSI B.1.20.1 - NPT

TECHNICAL CHARACTERISTICS

KV									
DN	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"
KV	3	7,8	14	18	24	30	66	126	180

KV = Flow rate in m³/h with a pressure drop of 1 bar

OUR CERTIFICATIONS

